

Reflective Security LLC

5232 Airport Hwy, Toledo OH 43615
1-419-842-4554 (Office)
1-419-754-2327 (Fax)


PRODUCT SPECIFICATION SHEET

Product: **PAS 003 L/S 1 3/16"**

MAKEUP:

- Layer 1: **3/8" Glass**
- Layer 2: **.025 Urethane**
- Layer 3: **3/8" Glass**
- Layer 4: **.05 Urethane**
- Layer 5: **1/8" Polycarbonate**
- Layer 6: **.05 Urethane**
- Layer 7: **3/16" Glass**

**ATTACK
SIDE**

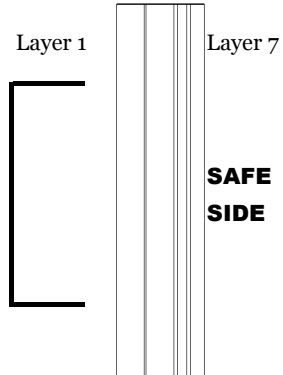

- OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent
White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E
Many more to choose from (please inquire)
Size and Thickness may not be available for every option

Thickness Average	Weight Lbs	Light Transmissior	Dimensional Tolerance
1.2	13.5	75%	ASTM C 1349

- STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**
ASTM C 1036 Standard Specification for Flat Glass.
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass

BALLISTIC AND FORCED ENTRY RATINGS

- H.P. White TP-0500.01 Level I – Forced Entry
- U.L. 752 Level III – 44 mag

Proprietary Information not for Public Distribution